


# UT UNITRUCK LTD

CE

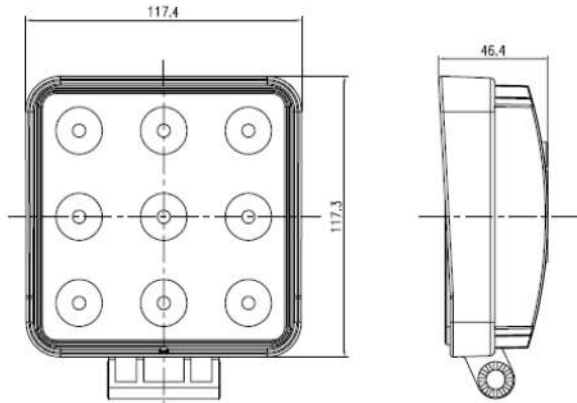

## Materials:

- Die cast aluminum alloy (ADC12) heat-sink
- Polycarbonate Lens
- PMMA front cover
- Silicone cable
- Powder Coat Finish

## Protected Against:

- Reverse polarity
- Shock proof, waterproof
- RFI/EMC interference
- Voltage and current surge

## Operating conditions:

- 10-30V DC input (available the other range)
- Environment temperature -40~+60 ° C

## Features:

- Thermal management regulation
- 30,000+ Hours life span
- 1 year warranty
- Flood and spot optical system
- Instant on/off

\*Based on LED manufacturer Specifications

Model	Beam type	LEDs	Power (watts)	Waterproof	AMP Draw (12V/24V)	Raw Lumens*	Certificate	Beam Distance (0.25lux@m)	Peak Beam Intensity(cd)
5523	Flood	9 x 3W Epistar	27	IP68	1.84/0.96	1450	CE	100	2500
5523A	Spot	9 x 3W Epistar	27	IP68	1.84/0.96	1450	CE	200	10000